


- escape route sign (maintained)
- bulkhead (maintained)
- bulkhead (non-maintained)
- houselight
- working light (white)
- working light (blue)

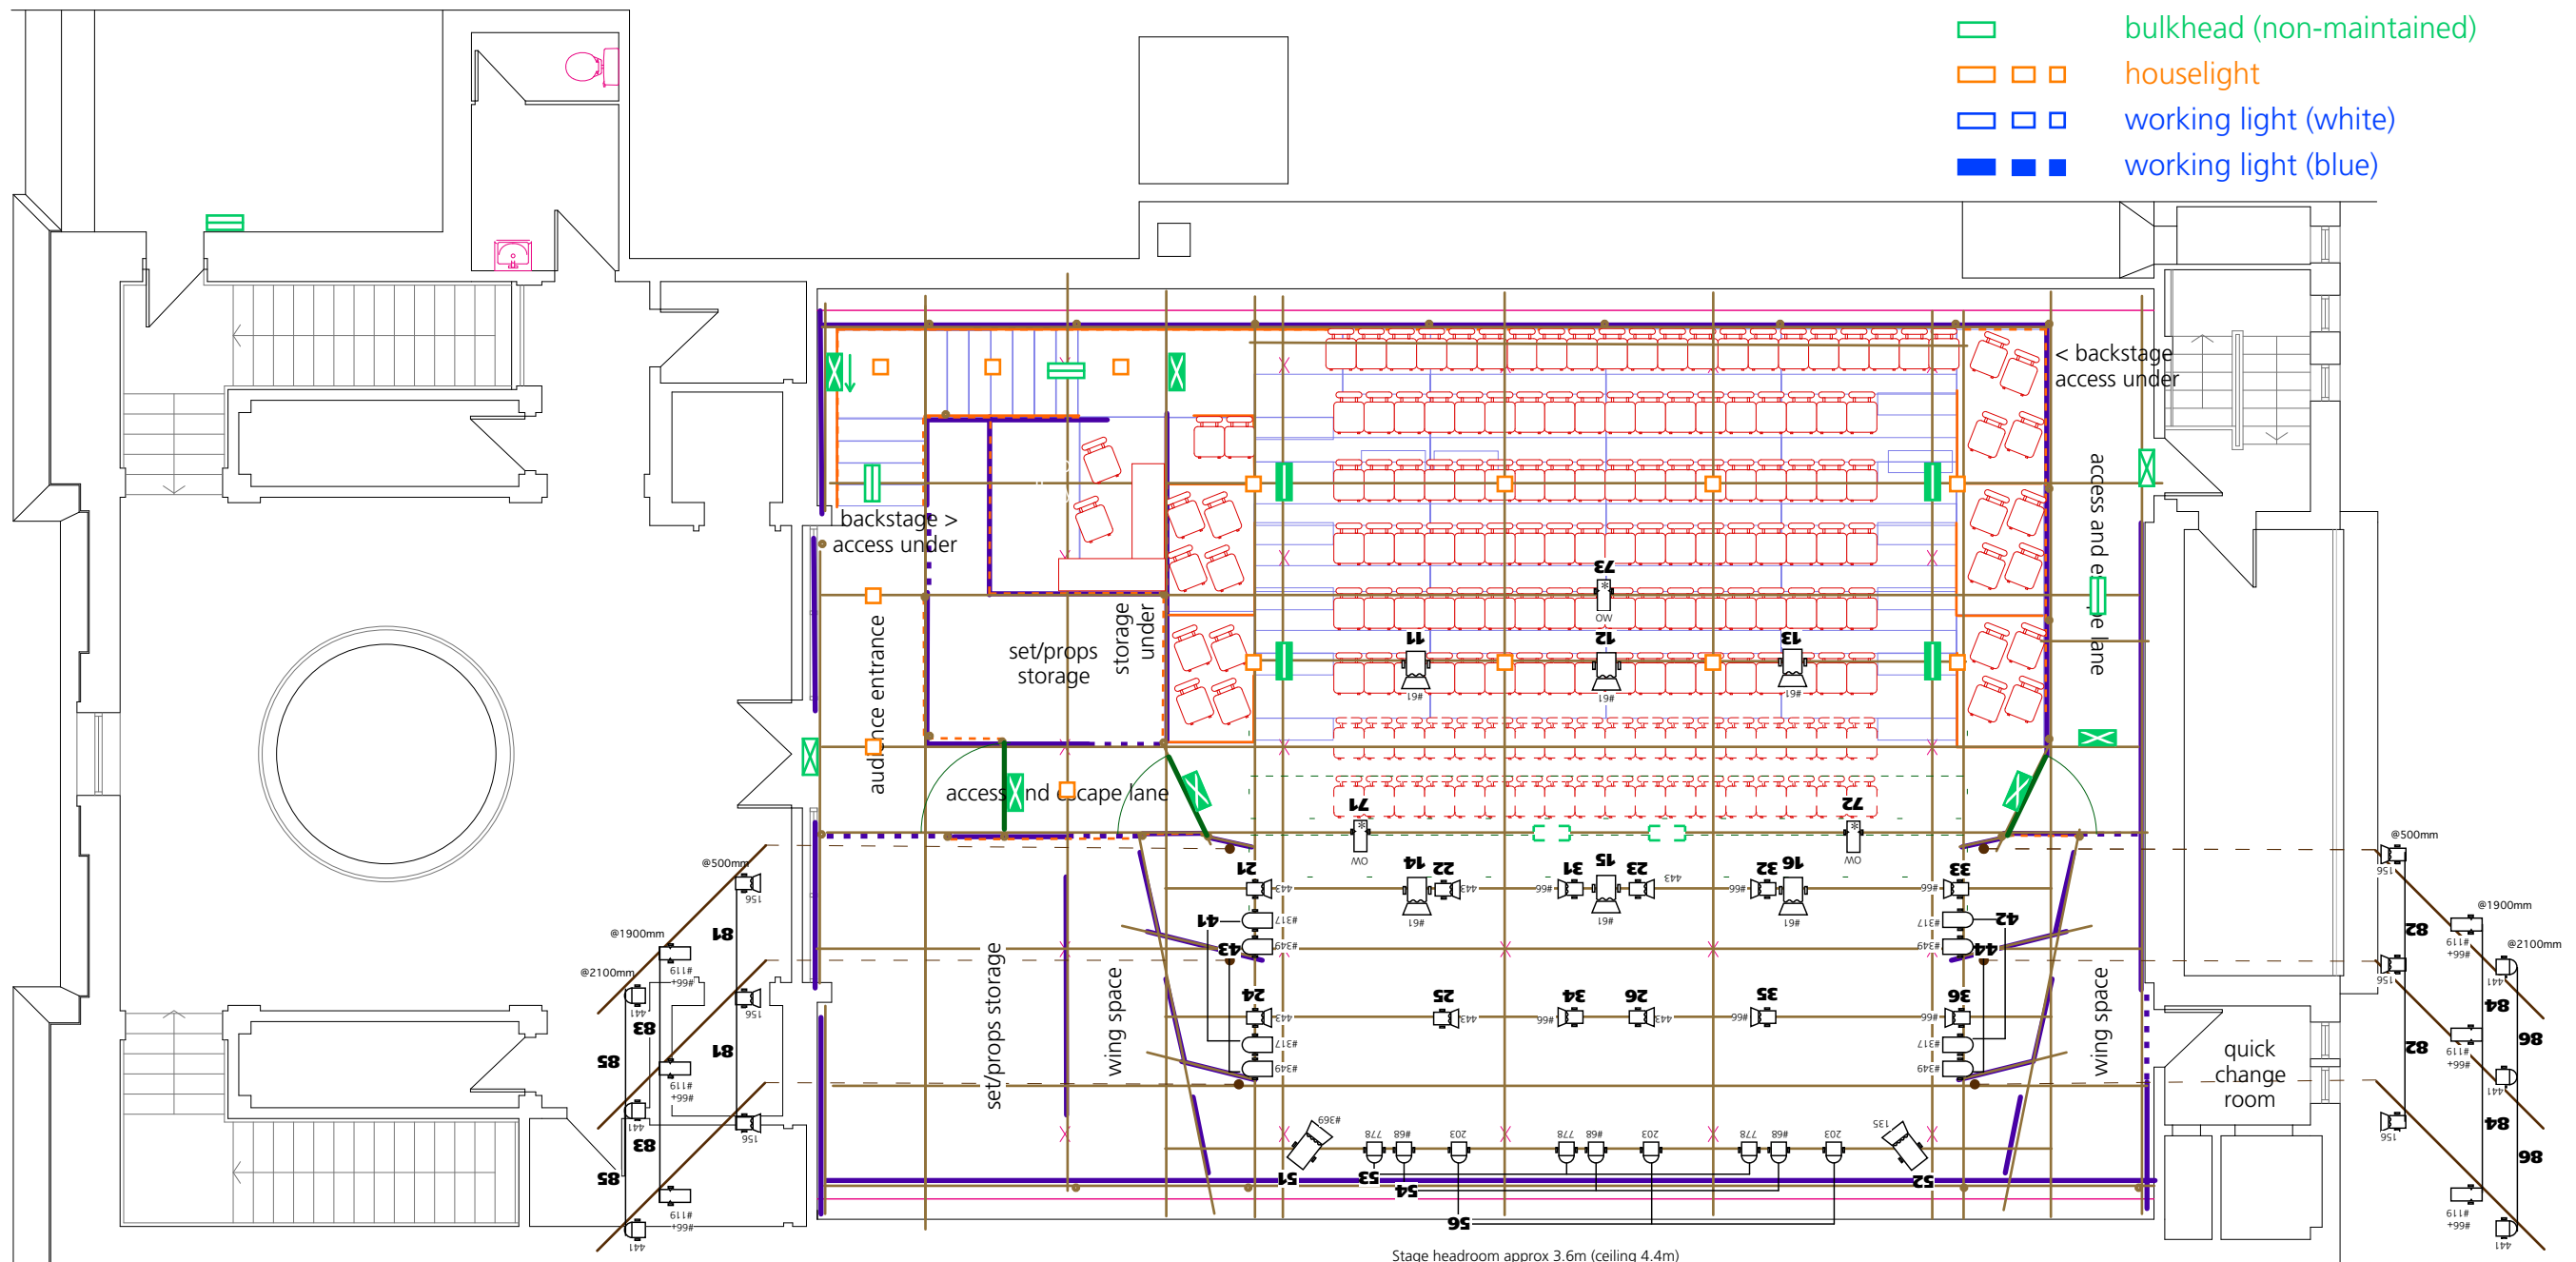

lighting

- Robe 250AT Profile
- Robe 250AT Wash
- 500 / 650W Profile wide angle zoom
- 500 / 650W Fresnel
- 1kW Fresnel
- 2kW Fresnel
- Par 64 CP62 1kW
- Source 4 Par 575w (WFL)
- * refocusable lantern
- 203 gel number (Rosco E Colour)
- #367 gel number (Rosco Supergel)

key

- scaffolding upright
- scaffolding at grid height
- scaffolding waist and knee rails
- solid panel to 790mm
- black drape
- openable black drape on track
- FOH display board/partition
- internal poster wall/drape
- limit of playing area
- no scenic pieces downstage of this line
- seats (fixed)
- seats (can be removed by arrangement)

rostra/steeldeck heights

- steeldeck/step @ 360mm
- steeldeck/step @ 720mm
- steeldeck/step @ 1080mm
- steeldeck/step @ 1440mm
- steeldeck/step @ 1800mm
- steeldeck/step @ 2160mm (intermediate steps every 180mm)

C venues Ltd accepts no liability for any inaccuracies
This plan is provisional and subject to change

For further information please contact C venues on
+44 (0)845 260 1030 or email production@cvenues.com

Copyright © C venues Ltd – plan updated 1 July 2011