


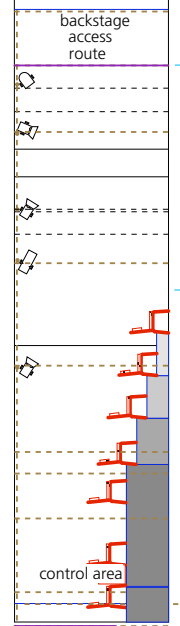











key

-  escape route sign (maintained)
-  bulkhead (maintained)
-  bulkhead (non-maintained)

Section Drawing



lighting

-  500 / 650W Profile wide angle zoom
-  300W Fresnel
-  Source 4 Par 575w (WFL)
-  * refocusable lantern
-  203 gel number (Rosco E Colour)
-  #367 gel number (Rosco Supergel)
-  19-24 by arrangement, these channels can be made available for repatching